26" to 36"-Long Cylindrical Filter Cartridges

Features

- Available in broad choice of media to fit specific operating conditions.
- Can be individually boxed or bulk packed on a pallet.....your choice.

Construction

- Shape: cylindrical
- To maintain full surface availability over the life of the filter, uniform pleat spacing is maintained with Donaldson's patented Pleatloc™ technique, and held in place with hot melt spiral beading on the tips.
- Liners: Expanded metal, either galavanized or stainless steel (see list below)
- Endcaps: Galvanized metal with fiber media potted in plastisol
- Gasket: Seamless urethane

Typically Used In:

- GDX (filters mounted horizontally)
- GDS (filters mounted horizontally)
- TTD(filters mounted vertically)

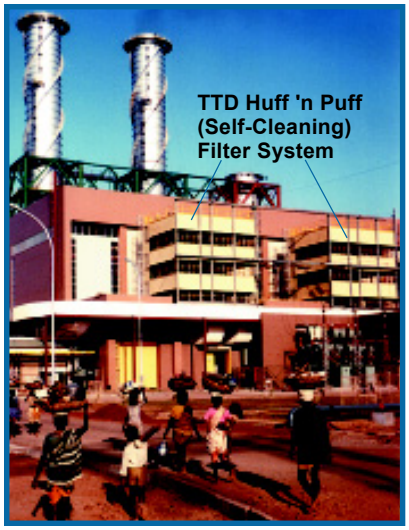

Dimensions	Diameter OD	Diameter ID	Length
	12¾"/324*mm*	8.38"/213*mm*	*see list below*

Part Numbers *(sorted by Length & Media)*

Part No.	Length	Media	Comments
P03-0025	26"/ 660*mm*	Spider-Web XP	Galvanized liners
P03-0166	26"/ 660*mm*	Spider-Web XP	SS inner liner
P03-0174	26"/ 660*mm*	Spider-Web XP	SS inner liner & endcaps
P19-1177	26"/ 660*mm*	Synthetic/Spider-Web	Use alone (TTD) or mate to P19-1178 (GDX/GDS)
P19-1607	26"/ 660*mm*	Synthetic/Spider-Web	SS liners & endcaps
P19-1701	26"/ 660*mm*	Synthetic/Spider-Web	SS inner liner. Use alone (TTD) or mate to P19-1619 (GDX)
P19-1149	26"/ 660*mm*	Synthetic/Spider-Web Treated for Flame Retardancy	Use alone (TTD) or mate to P19-1150 (GDX)
P19-1772	26"/ 660*mm*	Synthetic	SS inner liner
P03-0172	26"/ 660*mm*	Synthetic	SS end caps/liner
P19-1033	26"/ 660*mm*	Synthetic	Use alone (TTD) or mate to P19-1107 (GDX/GDS)
P03-0192	26"/ 660*mm*	Synthetic	SS inner liner & endcaps
P19-1772	26"/ 660*mm*	Synthetic	SS inner liner
P03-0179	26"/ 660*mm*	Duratek/Spider-Web	SS liners & endcaps
P19-1961	26"/ 660*mm*	Duratek/Spider-Web	SS inner liner
P19-1280	26"/ 660*mm*	Duratek/Spider-Web	Use alone (TTD) or mate to P19-1281 (GDX/GDS)
P03-0168	26"/ 660*mm*	Duratek	SS liners & endcaps
P19-9710	26"/ 660*mm*	Duratek	SS inner liner
P19-1236	26"/ 660*mm*	Duratek	Use alone (TTD) or mate to P19-1238 (GDX/GDS)
P19-1037	26"/ 660*mm*	Cellulose	Use alone (TTD) or mate to P19-1039 (GDX/GDS)
P19-1617	29"/ 737*mm*	Duratek	
P19-1463	30"/ 762*mm*	Duratek/Spider-Web	
P19-1713	30"/ 762*mm*	Duratek/Spider-Web	Set: P19-1463 with pre-filter wrap installed
P19-1462	30"/ 762*mm*	Duratek	
P19-1790	30"/ 762*mm*	Duratek	Set: P19-1492 with pre-filter wrap installed
P19-1461	30"/ 762*mm*	Cellulose	
P19-1726	30"/ 762*mm*	Cellulose	Set: P19-1461 with pre-filter wrap installed
P19-1767	36"/ 914*mm*	Duratek/Spider-Web	

Notes: *SS = stainless steel.*
Pre-filter wraps for these cartridges are listed on page 13.
Element retention hardware is listed on page 11.